


Art. 106720300
Self-priming Industrial Diaphragm Pump,
24 volt d.c, with 230-volt AC adapter
15 lpm pump, Santoprene diaphragm and Viton Valves

High-performance and reasonably priced diaphragm pump with connections for tube clips. The pump's sturdy design handles mildly aggressive chemicals and may be used even for wastewater with bigger particular pollution. It is self priming and sustains a possible dry run without damage. The Diaphragm pump is operated in a secure low voltage range.

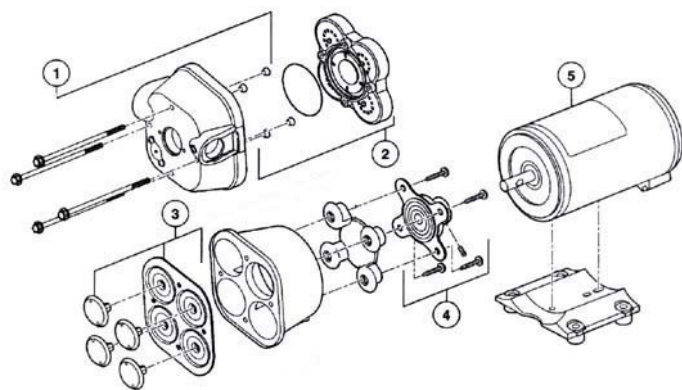

- Output: up to 15 litres/minute (4 gallons/minute)
- Connections: for 15mm (1/2") External thread & 15mm (1/2") ID hose
- Self priming up to 1.5m vertical lift (when dry)
- Glass filled polypropylene body handles mildly aggressive chemicals
- Can run dry without damage
- Thermal Overload Protected Motor
- Liquid temperatures from 7°C to 54°C
- Viscosities upto 250cP
- Continuous duty at 1 bar (15psi) head in 21°C ambient temperatur
- Fuse Size: 7A
- Dimensions: approx. 227mm long, 100mm wide, 98mm high
- Actual Weight: 2.80 Kg
- Power supply: external power supply with 230 volt AC adapter included.

Recommended accessories: stable base plate for industrial diaphragm pump, for direct use on the lab bench.
Material: PE, Basic dimensions: 120 * 210 mm. **Order No. 106720301**

Membranpumpe-Datenblatt-106720300-0911 ENG